

Megapixel's RS12 Ruggedized Switch for HELIOS[®] is customengineered to withstand rigorous outdoor environments or to provide an expanded selection of mounting points for indoor racks or rear of screen; RS12 offers more flexibility for demanding HELIOS deployments.



megapixel

RS12

SPECIFICATIONS

PART NUMBER	MVR-0050: RS12 Indoor Ruggedized HELIOS Switch Optional MVR-0051: RS12 Outdoor Enclosure
INPUT	1 x Neutrik™ opticalCON DUO Single Mode Fiber
OUTPUT	12 x 1GbE/2.5GbE CAT6A IP65-rated Weatherproof Neutrik™ etherCONs
MOUNTING POINTS	Dual rack, Rear of Screen, Outdoor
POWER	Neutrik™ powerCON TRUE1 Input 100V-240V, 50/60Hz, 1.2-06A
(IN KG LBS) WEIGHT	MVR-0050: 6.3 13.8 MVR-0051: 2.8 6.1
$(W \times H \times D \text{ IN } MM IN)$ DIMENSIONS	1.5RU MVR-0050: 482.5 x 65.6 x 255.1 18.9 x 2.5 x 10.0 MVR-0051: 490.0 x 87.5 x 304.8 19.2 x 3.4 x 12.0
OPERATING CONDITIONS	Outdoor Indirect Sunlight Only 0°C ~45°C
Copyright © 2024 Megapixel™. Patents and Trademarks Pending Worldwide. Specifications subject to change without notice. All Rights Reserved.	

sales@megapixelvr.com





RS12


Ruggedized Switch

MVR-0050



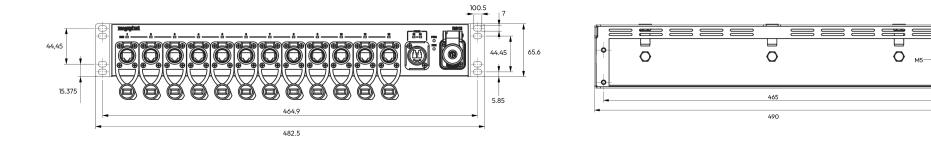

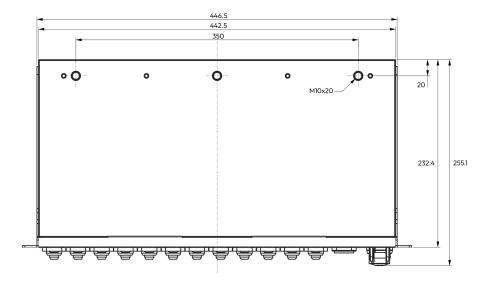

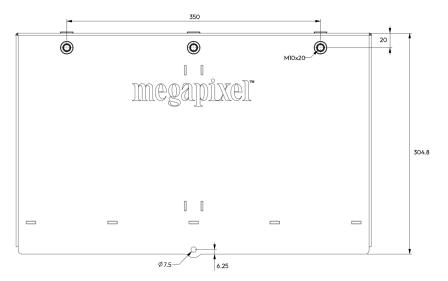

О М5-

-0

0

87.5 52.7

<u>+</u>___

8.2

